

# H360



# LED Moving Head

360W CW LED

25500Lux @ 10m

Compact fixture with high efficient optical system

Animation wheel, Color wheel, dual gobo wheel

Bi-directional 8/24-facet prism with variable speed

Best for concert, bar, events, road show etc.

DMX control


## Color




## Rotating Gobo



## Fixed Gobo




## Beam Angle 3.4°

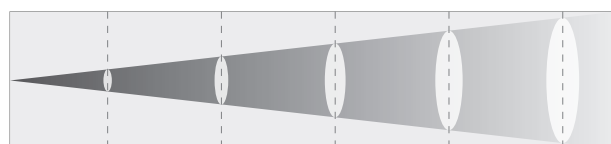

Distance (m)	5	10	20	30	50
LUX	102000	25000	6375	2833	1020
Diameter(m)	0.3	0.6	1.2	1.8	3

## Beam Angle 37.7°

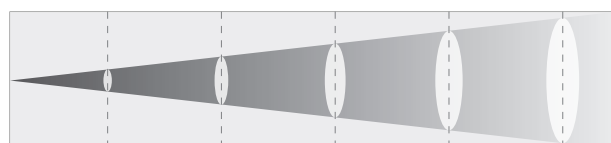

Distance (m)	5	10	20	30	50
LUX	6500	2340	585	146	65
Diameter(cm)	2.05	3.42	6.84	13.68	20.52

## Photometrics

Light source	360W CW LED
Output narrow angle:	5050Lm
Output wide angle:	13500Lm
LUX	102000Lux@5m; 6500Lux@3m
Color Temperature	7200K±300K
Lifespan	20000hrs
Beam angle	3.4° ~37.7°

## Key Features

Pan	540°
Tilt	270°
Color Mixing	CW+9 filters+open
Gobos	7 rotating gobos+open 12 fixed gobos+open
Animation	Animation wheel with variable speed
Focus	Motorized linear focus
Frost	5° frost
Strobe	0~30Hz
Dimming	4 dimming curves, 0~100% dimming
Prism	Bi-directional 8/24-facet prism with variable speed

## Control

Protocol	DMX512/RDM
DMX Channels	21CH
Onboard Menu	2.0 inchesTFT display

## Power

Mains	200~240VAC,50~60Hz
Power Connections	PowerCon In/Out
Data Connections	3pin DMX In/Out, Maximum with 32pcs
Consumption	420W@230V; 400W@230V
Power Factor	0.98/230V
Ambient	0~45°

## Physical

Dimension	355 x 257x 643 mm
Weight	22 kg
Cooling	Heat pipe and low noise fan

